

TECHNICAL DATA

FOZMULA
INNOVATION IN SENSORS

L100 series tank level management system



The **Model L100** series is designed for use in tanks requiring continuous level measurement of their contents and provides a display of the tank contents.

The system comprises two elements which are the control box, with digital display, and a high quality pressure transducer. The transducer is lowered to the bottom of the tank and measures the head of liquid which is converted by the controller and displayed as the percentage remaining of tank contents.

Alarm conditions on high and low level conditions trigger either visual or audible warnings, which optionally can be programmed according to customer needs.

SPECIFICATION

T/LL50 transducer

Dimensions:

Tank depth: Min 750mm, Max 4000mm (Diesel fuel)

Construction:

Enclosure: ABS
Sensor tube: Polyurethane flexible tube
Sensor housing: 316 stainless steel
Seals: Viton
Cable glands: IP68

Fluid Types:

Fluids compatible with Stainless Steel, PA66, polyurethane & Viton

Electrical:


Supply voltage: 240VAC nominal
LED: Hyperbright red
Alarm rating: >90Db @ 0.3M
Display: 3 figures LED

Maximum ratings:

Pressure (Hydrostatic): 5 psi
Accuracy: ±3% of total fluid depth

Environmental Ratings:

Temperature - operating: -20°C to +80°C
- storage: -55°C to +105°C
Sealing: IP57

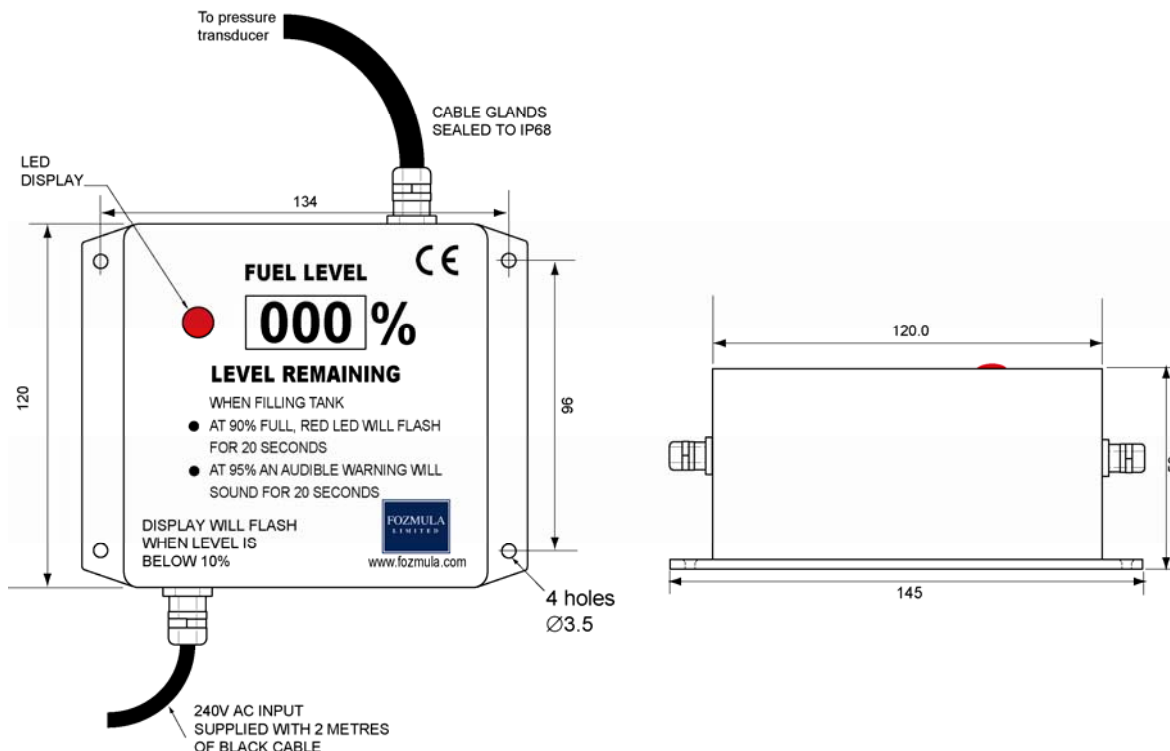

Berrington Road | Leamington Spa | Warwickshire CV31 1NB | UK

Tel: +44 (0)1926 466700 | Fax: +44 (0)1926 450473 | www.fozmula.com

www.fozmula.com

E. & O. E.© Fozmula Limited. September 2009 Issue No. 2

Since the suitability of these products depends upon a wide range of factors not in our control, Fozmula Limited expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Fozmula Limited reserves the right to make material changes, and or technical changes without notification.