

TECHNICAL DATA

PTF series pressure transducer

FOZMULA
INNOVATION IN SENSORS



The **Model PTF** series of high quality pressure transducers has been designed for use in many types of industrial and motorsport applications.

Engineered to provide maximum stability and durability, the pressure ranges up to 35 Bar use Ceramic Thick Film technology whilst the higher ranges utilise a Poly Silicon sensing element.

SPECIFICATION

Electrical:

Supply voltage: 5Vdc or 10-32Vdc
Current consumption: <10mA
Connections: 4 way Delphi Packard Metripac connector or 600mm cable
Output signal: 0.5 - 4.5V ratiometric, 0 - 5Vdc or 4-20mA. Other voltages and mA outputs are available on request.
Accuracy: ±0.5% FS
Stability: ±0.1%

Environmental Ratings:

Temperature - operating: -40°C to +125°C
- compensated: 0 - 85°C
Sealing: IP67
Weight: ~50g

Pressure ratings:

5, 10, 16, 25, 40, 60, 100 & 160 Bar gauge. Other ranges are available on request

Construction:



Body: 316 Stainless steel
Connector: 30% glass filled Nylon 6

Mechanical data:

Thread sizes: Typically 1/8" NPT, G1/4" Male, 1/4" NPT Male, 7/16" UNF, 9/16 UNF, M10, M12 & M14. Other sizes are available on request
Overrange pressure: 2x rated pressure
Burst pressure: 5x rated pressure
Pressure cycles: >10 million

Ordering data (PTF followed by one item from each of the sections below)

Port size		Pressure rating		Output		Wetted material		Electrical connection	
1	G 1/4 Male	1	5 bar	1	4..20mA	1	316 stainless steel	1	Packard Metripac
2	1/4" NPT Male	2	10 bar	2	0 - 5V	2	304 stainless steel	2	Flying lead
3	1/8" NPT Male	3	16 bar	3	0 - 10V	3	Hasteloy	3	Miniature DIN 43650
4	7/16" - 20 UNF Male	4	25 bar	4	0.5 - 4.5V	4	Inconel	4	Standard DIN 43650
5	9/16" - 18 UNF Male	5	40 bar					5	AMP Superseal
6	M14 x 1.5 Male	6	60 bar					6	DIN72585 Bayonet
7	1/4" SAE Female	7	100 bar					7	Deutsch DT4-4P
8	3/8" - 24 UNF (Dash size 3)	8	160 bar						
9	M12 x 1.5 Male								

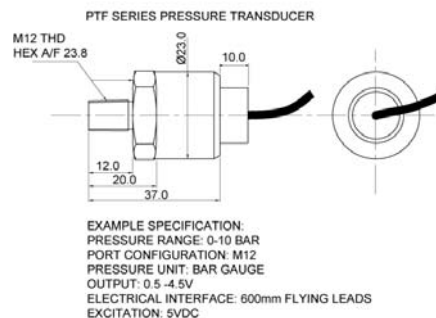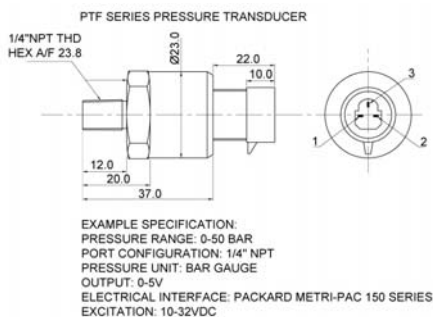

Berrington Road | Leamington Spa | Warwickshire CV31 1NB | UK

Tel: +44 (0)1926 466700 | Fax: +44 (0)1926 450473 | www.fozmula.com

www.fozmula.com

E. & O. E.© Fozmula Limited. November 2008 Issue No. 1

Since the suitability of these products depends upon a wide range of factors not in our control, Fozmula Limited expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Fozmula Limited reserves the right to make material changes, and or technical changes without notification.