


TECHNICAL DATA

FOZMULA
INNOVATION IN SENSORS

T/LL140 series fuel level sensor

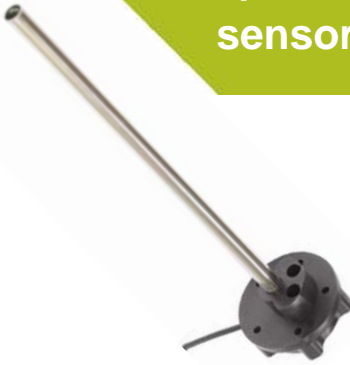

The **Model T/LL140 series** is a range of highly advanced sensors for continuously measuring the contents of a fuel tank. The products include a feature whereby they can be cut to length* and be recalibrated.

A low level alarm switches when the fuel drops below a predetermined level (default is 1/8th of the tank), but the alarm point can be optionally specified anywhere between 0-100%.

SPECIFICATION

Dimensions:

Probe length: Min 200mm, Max 1100mm (Min 7.9", Max 43.3")
Note: the probe length should leave min. 25mm from the end of the probe to the base of the tank.

Electrical:

Supply voltage: 12 or 24Vdc nominal*
Connections: 500mm long flying leads which can be optionally fitted with any specified receptacle
Supply current: 28mA@12Vdc + output load
Accuracy: ±2.0% of depth @ 20°C (+68°F)

*Protected against overvoltage (80Vdc for 2 minutes) and incorrect electrical connection

Outputs:

Resistive: One from: 10-180Ω, 240-33Ω or 3-180Ω. Not suitable for constant current application.
Voltage: Selectable: 0-5V, 5-0V or any voltage range in between these limits (ascending or descending). Vout is protected from damage if misconnected to V+ (>32V) or Gnd.
Alarm: Switch to ground at 1/8 tank depth - max load 100mA - optionally adjustable between empty and full.
Warning Output Load: 100mA max.

Construction:


Housing: 30% glass filled Nylon 66
Sensor tube: Stainless steel 316
Internal insulators: PTFE
Internal sensor: Aluminium
Wetted seals: PTFE & Nitrile

Fluid Types:

Diesel, biodiesel, kerosene, petrol. Not suitable for fuels with a high dielectric constant.

Environmental Ratings:

Temperature - operating: -40°C to +85°C (-4°F to +185°F)
- storage: -40°C to +105°C (-40°F to +221°F)
Max tank pressure: For use in unpressurized tanks
Vibration: BS EN 60068-2-64:1993 (15.3grms)
Sealing: IP67
Shock: 50g 6.3ms
Weight: 300g (10 oz) (1M long unit)
EMC: Type approval in accordance with EN ISO 13766:2006

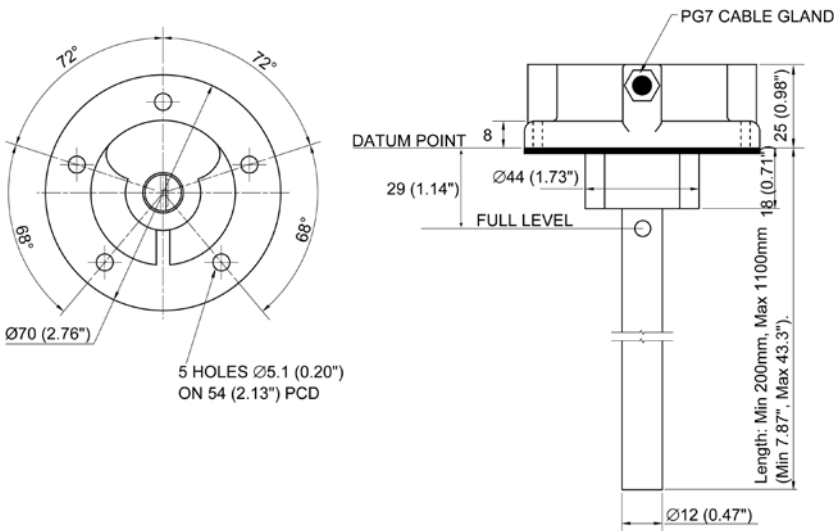

Model	Output
T/LL140	Resistive
T/LL141	Voltage
T/LL142	PWM

Wire colour codes:

Red: V+ (9 ~ 34V)
Green: V- (Ground)
Yellow: LLA max 100mA
Blue: Signal out (V)
Black: Signal out (Ω)
White: Calibration

* Part Number CA0482 probe length adjustment kit must be purchased if the sensor is to be cut to a different length.

Berrington Road | Leamington Spa | Warwickshire CV31 1NB | UK

Tel: +44 (0)1926 466700 | Fax: +44 (0)1926 450473 | www.fozmula.com

www.fozmula.com