

The **Model S81** is an active device which is designed to give an alarm signal if fluid falls below a preset level. It will only signal an alarm after a few seconds of low level to eliminate false alarms due to turbulence. The fact that the **Model S81** has no moving parts and incorporates a built in delay means it is ideal in applications where mechanically operated switches mis-trigger due to vibration and fluid turbulence.

Specification

Electrical Rating

Supply Voltage: 5 VDC or 7 - 35 VDC
 Supply Current: 1.5mA + source output
 Max. Load Current: 1.0A (sink) or 20mA (source)
 Alarm Delay Time: 0 - 25 secs rising or falling (factory set)
 Connection: 4 way DIN 72 585 connector
 Start up Delay: 1 - 10 secs

Fluid Types

Water based fluids compatible with Brass, PTFE and NBR rubber

Environmental Ratings

Sealing: IP67
 Max. pressure: 5.0 Bar (72 psi)
 Temp. ranges: Fluid: -40°C to +130°C
 Storage: -50°C to +140°C
 Weight: 53g
 EMC: Type approval to EN ISO 13766:2006

Note: Torque setting on installation should not exceed 22Nm. Unit should be tightened with a 31mm ring spanner or 31mm socket.



Construction

Body: Brass
 Probe: PTFE
 Terminals: CZ121 Brass, Tin Plated
 Seals: NBR rubber
 Connector: 30% Glass Filled Nylon 6
 Thread: Polyacrylate Aqueous Emulsion Base (Dri-Seal 5061) - 1/4" NPT only

Connections

See diagram below




Note: Outputs are factory selectable and dual outputs on output 1 are available on request.

Vibration (15.3 grms)

3 orthogonal planes for 3 hours per plane

Frequency (Hz)	G2/Hz
24	0.04
60	0.5
100	0.5
240	0.1
2000	0.1

Testing performed in accordance with BSEN 60068-2-64 : 1993

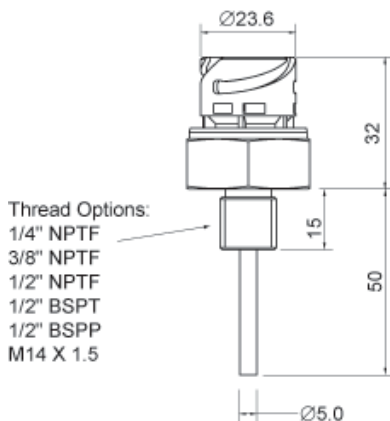

Optional accessory:

Mating connector kit to suit harness wire cross sectional area of 0.5 to 1.5mm² :

Our Part no	Description
C/K2	Connector kit comprising of: Crimp Terminals (x4) Cable seals (x4) Connector plug 4 way (x1)

Fozmula Limited, Berrington Road, Leamington Spa, Warwickshire, CV31 1NB, UK

Tel: +44(0)1926 466700 Fax: +44(0)1926 450473 E-mail: sales@fozmula.com Website: www.fozmula.com

E. & O. E. © Fozmula Limited. August 2008 Issue No. 3

Since the suitability of these products depends upon a wide range of factors not in our control, Fozmula Limited expects and understands that you will conduct the testing and evaluation necessary to determine that these products are suitable for your application. Whilst every effort is made to ensure the above details are correct at the time of printing, Fozmula Limited reserves the right to make material changes, and or technical changes without notification.

